



KF4-WE

Wireless keyfob
4 button, two way



RINS1434-2

KF4-WE Learning

1. Put the Enforcer control panel into the "Change Codes" menu (see Enforcer User Manual for full details).
2. When prompted to enter a new user code, press any keyfob button.
3. Once asterisks appear on the Enforcer keypad, the new keyfob is learned on the system.

Locking the Keyfob

All 4 buttons on the keyfob may be locked so that any accidental presses won't affect your alarm system.


Locking the keys on the keyfob is performed by pressing any buttons that are **diagonal** with one another at the same time; ie Lock & II or Unlock & I.

The RED LED will flash indicating that the fob has been locked.

To unlock, press both buttons together again, and the GREEN LED will flash indicating that the keyfob is now unlocked.

Note: When locked, the LED status is disabled.

The KF4-WE Buttons

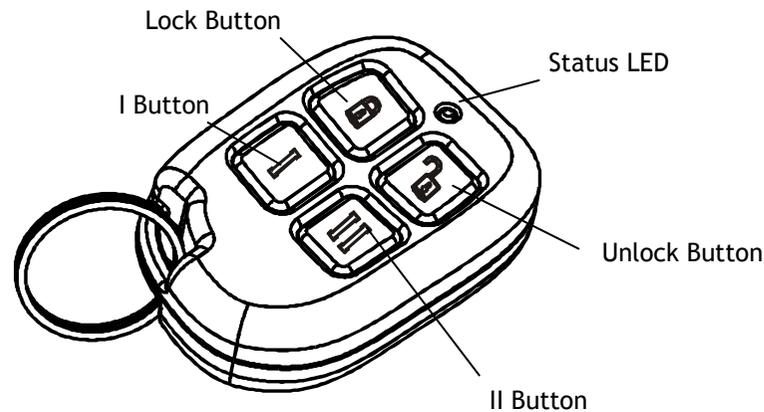

Changing The Battery



The batteries supplied have been chosen to provide long service life whilst, for safety reasons, having limited output current.



Replace only with approved batteries.



To prevent possible damage to components, any static charge on your body needs to be eliminated before touching the inside of the unit. This can be accomplished by touching some grounded/earthed metallic conductor such as a radiator/pipework immediately before replacing the batteries.

Resetting the keyfob

To do a nvm reset on the keyfob, first remove the battery, then press and hold down the lock and unlock buttons together and reinsert the battery at the same time. Continue holding down the buttons for another 10 seconds and then release.

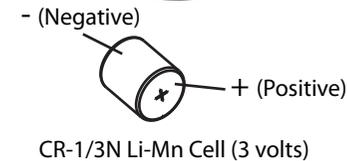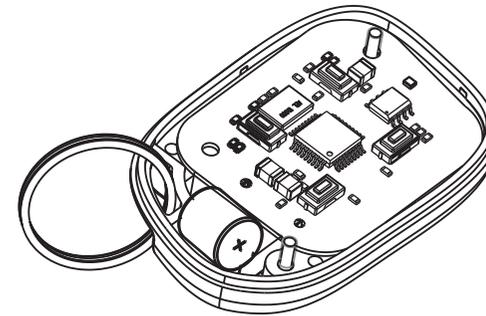

Specifications

Transmission Frequency: 868MHz
Transmission Method: Fully encrypted rolling code
Transmission Range: 300m free space
Battery: CR-1/3N Li-Mn Cell (3 volts)
Battery Life: Up to 2 years
Operating Temperature: -10 to +40 °C
Emissions: EN55022 Class B
Immunity: EN50130-4
Dimensions: 60 x 40 x 15 mm
Weight: 28g

Certification

WARRANTY: This product is sold subject to our standard warranty conditions and is warranted against defects in workmanship for a period of one years. In the interest of continuing improvements of quality, customer care and design, Pyronix Ltd reserves the right to amend specifications without giving prior notice. (Batteries not included in warranty)



EN50131-3:2009
EN50131-5-3:2005
Security Grade 2
Environmental Class II

Pyronix Ltd
Braithwell Way
Hellaby
Rotherham
South Yorkshire
S66 8QY

Customer Support:
+44(0)845 6434 999 (local rate)
or +44(0)1709 535225

Hours: Mon to Fri, 8:00am till 6:30pm
Email: customer.support@pyronix.com
Website: www.pyronix.com